


Odbočka kolmá K-ID/DN/90°

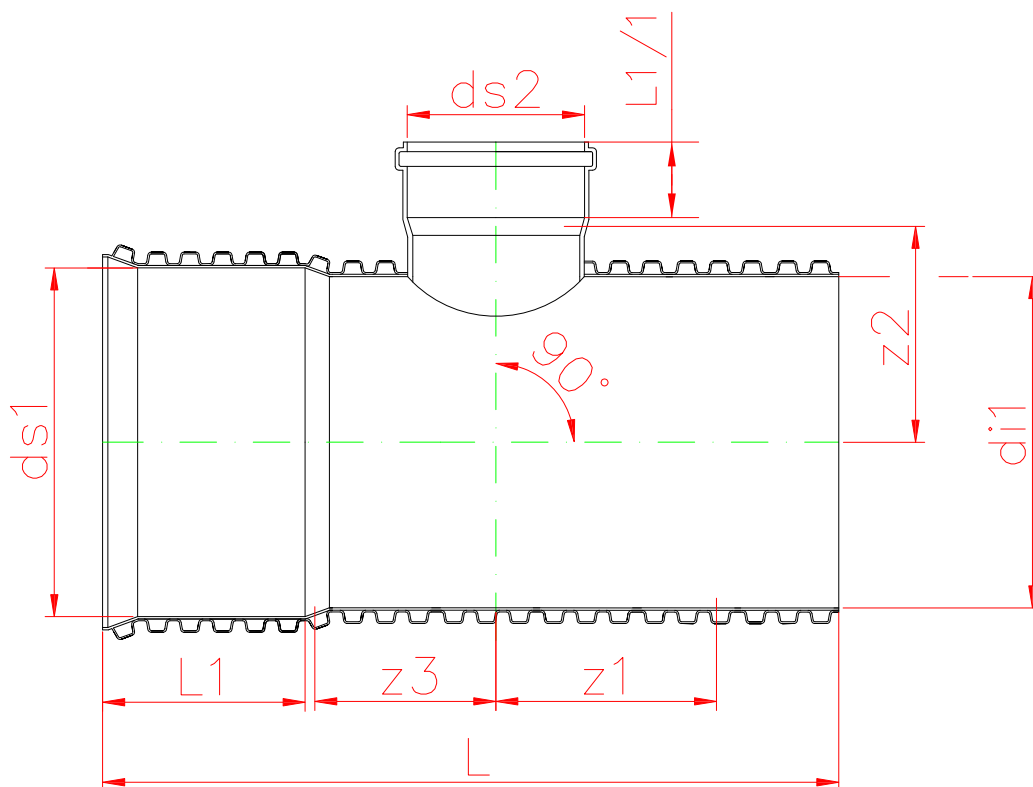

K-ID	di 1	ds 1	ds 2 min	L 1	L1/1	L	z1 min	z2 min	z3 min
300/DN160/90°	300	333,8	160,5	195	70	700	167	223	143
300/DN200/90°	300	333,8	200,6	195	85	700	117	206	193
300/DN315/90°	300	333,8	316,0	195	145	700	157	237	153
400/DN160/90°	400	445,5	160,5	195	70	720	142	273	166
400/DN200/90°	400	445,5	200,6	195	85	800	219	256	181
400/DN315/90°	400	445,5	316,0	195	145	840	214	287	226
600/DN200/90°	600	661	200,6	225	85	1007	319	356	178

K tvarovke sa dodáva 1ks tesniaceho krúžku podľa príslušného priemeru a 1ks Gummi-Lippendichtungen podľa príslušného priemeru odbočenia.